




**DHT HAMMER | 15"**

**Product Specification**

DTH HAMMER	Standard Backhead Size	Outside Diameter (mm/inch)	Length (mm/inch)
15" HAMMER	API 8 5/8 Reg. PIN, BOX	350mm	1777mm
Outside Diameter of Piston (mm/inch)	Stroke (mm/inch)	Weight (kg/lbs)	Shank Type
260mm	100mm	1080kg	N120, N120S, N125

**Air Consumption Chart**

DTH HAMMER	100 PSI (7kg/cm <sup>2</sup> )	150 PSI (10.5kg/cm <sup>2</sup> )	200 PSI (14kg/cm <sup>2</sup> )
15" HAMMER		1650 CFM	2090 CFM
250 PSI (17.5kg/cm <sup>2</sup> )	300 PSI (21kg/cm <sup>2</sup> )	350 PSI (25kg/cm <sup>2</sup> )	
2680 CFM			

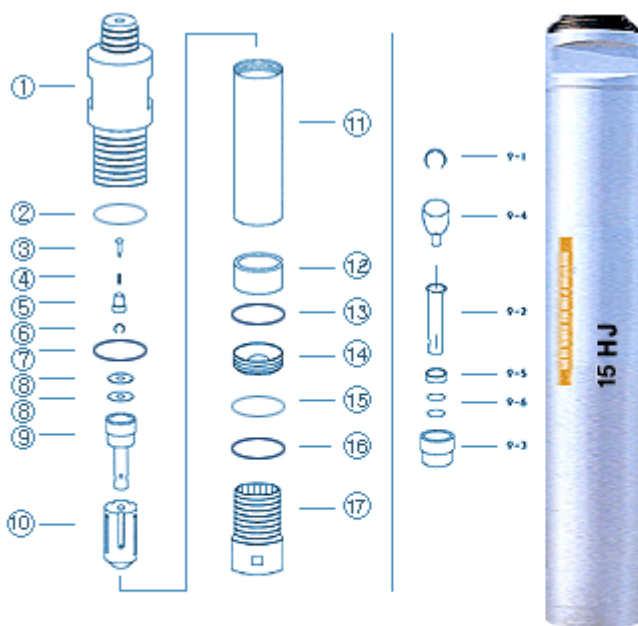

NO	Part Name	Part NO
1	BACK HEAD	1501
2	BACK HEAD "O" RING	1502
3	CHECK VALVE	1503
4	CHECK VALVE SPRING	1504
5	CHECK VALVE HOUSING	1505
6	CHECK VALVE SNAP RING	1506
7	THRUST WASHER	1507
8	BELEVILLE WASHERS	1508
9	FEED TUBE ASS'Y	1509
9-1	FEED TUBE SNAP RING	1509-1
9-2	FEED TUBE	1509-2
9-3	FEED TUBE HOUSING	1509-3
9-4	CHOKE	1509-4
9-5	FEED TUBE COMPRESSION RING	1509-5
9-6	FEED TUBE "O"RING	1509-6
10	PISTON	1510
11	CASE	1511
12	BIT BEARING	1512
13	STOP RING (URETHANE)	1513
14	BIT RETAINNER RING	1514
15	BIT RETAINNER RINGS"O"RING	1515
16	THRUST WASHER	1516
17	CHUCK	1517